Manual speed controller

Series ATFC 400V

Industrial tri–phase 5-step transformer speed controllers for voltage controllable motors, with high benefits and applicable for small engines and all kinds of domestic or industrial facilities. Each series incorporate non controled 230V output, control circuit is glass fuse protected.

Specifications

Supply voltage:	3X400+N Vac / 50-60Hz
Max intensity:	1.0A –14A according model
Control type:	5-step switch
Switch ON/OFF:	Integrated in switch
Indicator lamp:	ON (green)
Regulation:	Min. or max.
Output:	230Vac not controlled (L1) 5-step controlled (0-130-170-220-270-400V)
Protection:	Fuse 0,5A (control)
Connection:	Terminal Block
Enclousure:	Steel RAL 7035, IP54


Advantages

Special for ventilation systems
High quality and low price
Easy installation

CE Norms

These controllers comply with following mentioned European norms:
EMC 89/336/CEE modified by 92/31/CEE and low voltage norm 72/23/CEE
RoHS compliant

Wiring diagram

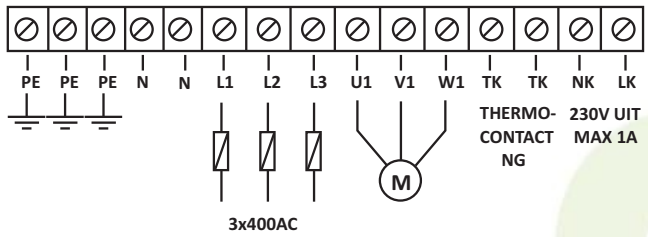

MODEL WITH TK	CODE	MODEL WITHOUT TK	CODE	INTENSITY	SURFACE MOUNTING IP54 DIMENTIONS (mm)	WEIGHT (kg)
ATFC+TC 400V 1,0A	125050	ATFC 400V 1,0A	125040	1,0A	280 x 200 x 140 PLASTIC	5,80
ATFC+TC 400V 2,0A	125051	ATFC 400V 2,0A	125041	2,0A	280 x 200 x 140 PLASTIC	8,50
ATFC+TC 400V 3,0A	125052	ATFC 400V 3,0A	125042	3,0A	280 x 200 x 140 PLASTIC	10,70
ATFC+TC 400V 4,0A	125053	ATFC 400V 4,0A	125043	4,0A	400 x 300 x 200 PLASTIC	14,80
ATFC+TC 400V 5,0A	125054	ATFC 400V 5,0A	125044	5,0A	400 x 300 x 200 METAL	16,50
ATFC+TC 400V 7,0A	125055	ATFC 400V 7,0A	125045	7,0A	400 x 300 x 200 METAL	24,10
ATFC+TC 400V 11,0A	125056	ATFC 400V 11,0A	125046	11,0A	400 x 300 x 200 METAL	37,20
ATFC+TC 400V 14,0A	125057	ATFC 400V 14,0A	125047	14,0A	400 x 400 x 200 METAL	39,10